
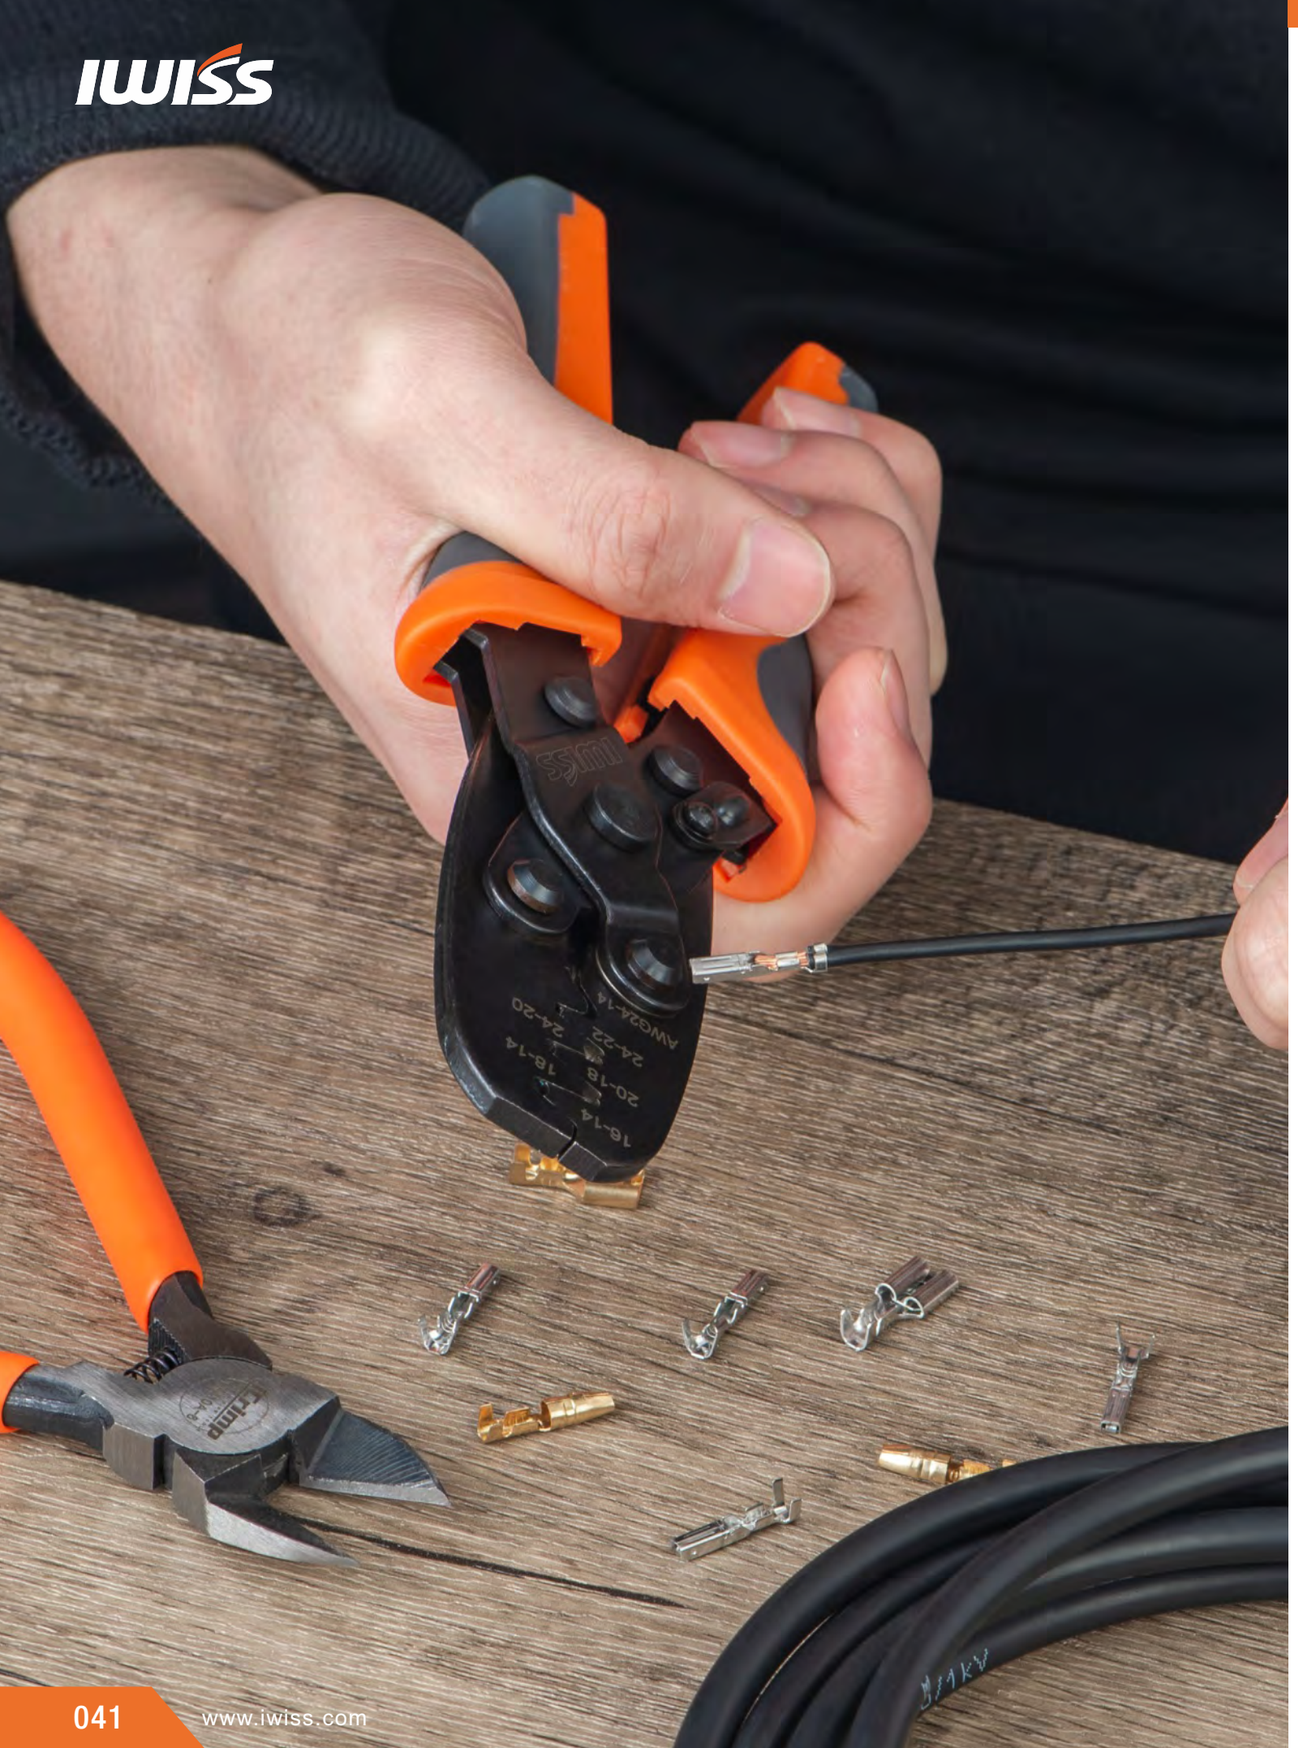


IWS-1424A

CRIMPER FOR MICRO OPEN BARRELS

- Five cavities perform "B" type conductor for open barrel non insulated terminals
- Equivalent to Delphi/Packard 12085271 and/or SPX Kent Moore J-38125-7 crimper
- Hinged mechanism keeps the jaws parallel for a straight crimping engagement
- Comfortable rubber handle grips make it easy to use and easy to clean up
- Comfortable non-slip grip ensures less user fatigue and more productivity

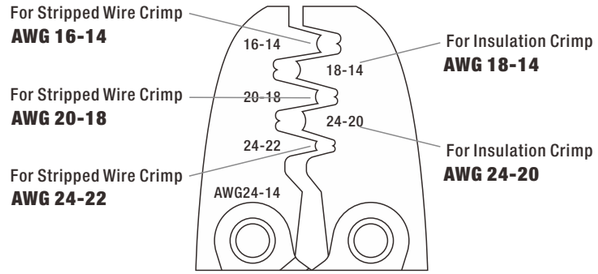

Item NO.	Capacity	Criming Profile	Length	Weight
IWS-1424A	0.2-2.0mm² 24-14 AWG		195mm	0.3Kg



IWS-1424A



Applicable to non insulated open barrel terminal from Molex, Delphi, AMP/Tyco, Harley, PC/Computer, Automotive and Deutsch stamped & Formed contacts.

