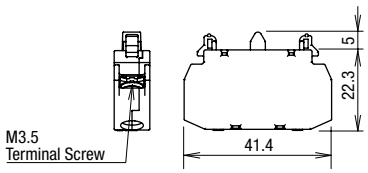
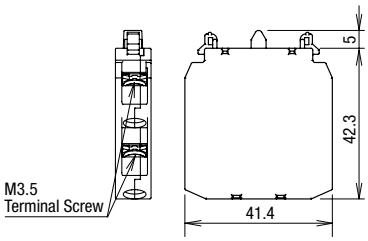


## Maintenance Parts

| Name & Shape | Part No. | Description & Dimensions (mm) | | | Package Quantity |
|---|---|---|---|---|---|
| Single Contact Block  | YW-E10 | Contact: 1NO | Color: blue |   | 10 |
| | YW-E01 | Contact: 1NC | Color: reddish purple | | |
| Double Contact Block  | YW-EW20 | Contact: 2NO | Color: blue |   Note: Double contact blocks cannot be used on emergency stop switches. | 10 |
| | YW-EW02 | Contact: 2NC | Color: reddish purple | | |
| | YW-EW11 | Contact: 1NO-1NC | Color: blue and reddish purple | | |
| LED Lamp  | LSED-6②N | 6V AC/DC | Specify a color code in place of ② in the Part No.: A (amber), G (green), PW (pure white), R (red), S (blue), Y (yellow) See B-271 for applicable units and rated current. Note: Yellow LED lamps are used for white illumination of pilot lights and illuminated pushbuttons.   | | 1 |
| | LSED-1②N | 12V AC/DC | | | |
| | LSED-2②N | 24V AC/DC | | | |
| | LSED-H②N | 110V AC/DC | | | |
| | LSED-M3②N | 230/240V AC/DC | | | |
| Incandescent Lamp  | LS-T6P | 6.3V, 1W | One pack contains 100 incandescent lamps.   | | 100 |
| | LS-T8P | 18V, 1W | | | |
| | LS-T3P | 30V, 1W | | | |
| Spare Key  | YW9Z-SK00PN02 | | | | 2 |